




Wood Treated Right™

Mold Control Study: Florida's Gulf Coast Field Installation Test

Conducted by: R&D Department, Arch Wood Protection

Methodology: FrameGuard coated samples and uncoated controls, in two species, were exposed to the elements in Ft. Myers, FL, an area characterized by high temperatures, rainfall and humidity. As the following chart shows, after 240 days, there was significantly less growth of mold on corresponding samples of FrameGuard wood.

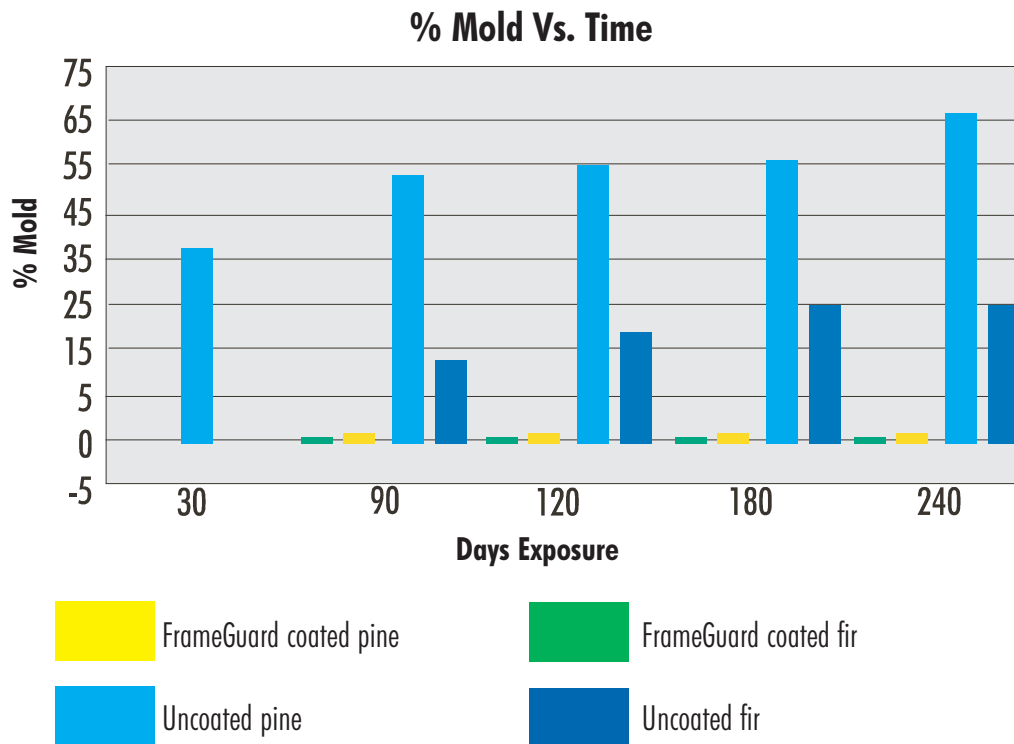

PRODUCT DATA

NOTE: Weather-shielded samples exhibited virtually no mold growth and are not shown.

Conclusion: FrameGuard coating showed excellent results in controlling mold growth in both Southern Pine and Spruce/Pine/Fir.